

VCR SERIES

TIPPER COUPLINGS

INTRODUCTION

Holmbury Tipper Couplings use a screw thread connection. The female coupling has a wing nut sleeve which enables operators to connect the couplings by hand, even when there is low residual pressure in the line.

APPLICATIONS

Tipper Couplings are designed for use on mobile plant such as commercial vehicle trailers, agricultural equipment and construction plant.

MATERIALS

Zinc plated carbon steel body material with nitrile seals and PTFE backing ring.

TECHNICAL DETAILS

Maximum working pressure for both sizes is 250 bar. Working temperature range with nitrile seals is -20°C to +100°C

ACCESSORIES

PARKING STATIONS

Parking stations help avoid accidental damage and provide a storage location.

PLUGS


Available for female couplings to prevent the ingress of dirt and avoid damage.

CAPS

Available for male couplings to prevent the ingress of dirt and avoid damage.



PRESSURE DROP CHARACTERISTICS

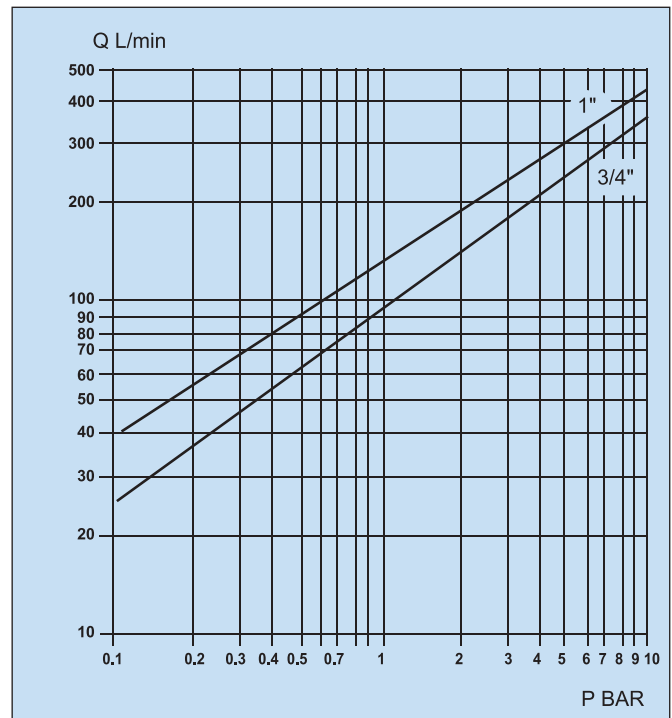

ORDER CODES

* VCR ** BSP

M = male
F = female


Type & Size

Thread - BSP


DUST CAPS & PARKING STATION SEE PAGE 53




VCR SERIES, TIPPER COUPLINGS

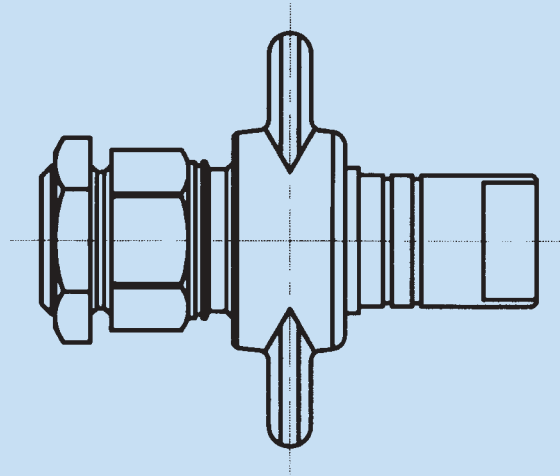

Female and Male Coupled

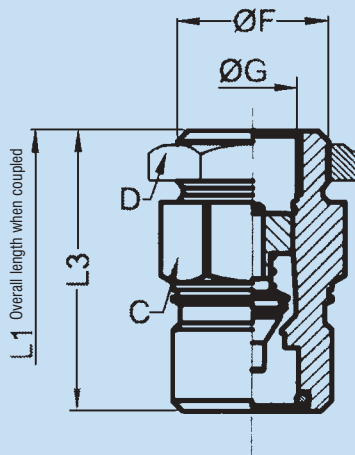

Male

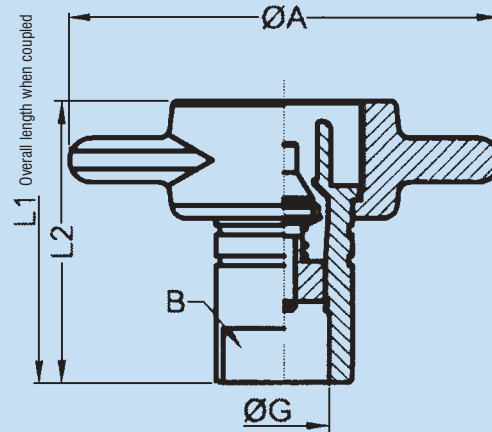

Female

Male

Part Number	ØG	C	D	L1	L3	ØF
M VCR 34	3/4" BSP	46	50	128.2	75.7	1. 1/4"
M VCR 100	1" BSP	55	60	144.6	82.8	1.3/8"

Female

Part Number	ØG	B	L1	L2	ØA
F VCR 34	3/4" BSP	33	128.2	74.5	115
F VCR 100	1" BSP	40	144.6	82.8	115